


EXHAUST FANS

PART NO.	DOWN BLAST, ROOF MOUNTED, DIRECT DRIVE FAN	PRICE (FAN ONLY)	VOLTAGE	MAX CFM	WEIGHT LBS.	ROOF MOUNTED DAMPER	FLAT ROOF CURB, INSULATED		
								115V	230V
^64408	FAN 5DDD085A 8"	Non-stock*	115V 1 PH	417	26	5ACC12RD	5ACC17FT	5ACC03SC	x
^59551	FAN 5DDD10AA 10"	\$336.15	115V 1 PH	944	44	5ACC12RD	5ACC17FT	5ACC03SC	x
^59549	FAN 5DDD12CA 12"	\$398.98	115V 1 PH	1744	55	5ACC15RD	5ACC20FT	5ACC06SC	x
^62624	FAN 5DDD13DB 13"	\$535.92	115/230V 1 PH	2223	66	5ACC15RD	5ACC20FT	RPE10	RPE210
^65287	FAN 5DDD16DB 16"	\$659.12	115/230V 1 PH	2913	149	5ACC15RD	5ACC24FS	RPE10	RPE210
^69242	FAN 5DDD18EB 18"	Non-stock*	115/230V 1 PH	4030	164	5ACC19RD	5ACC28FS	RPE10	RPE210

*Call for pricing.

Dimensions

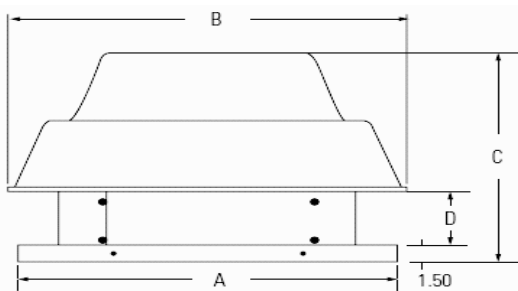

MODEL	A	B	C	D
5DDD 085A	19"	18 7/8"	13 1/4"	3 1/2"
5DDD 106A	19"	22 3/8"	16 1/2"	3 3/8"
5DDD 10AA	19"	22 3/8"	16 1/2"	3 3/8"
5DDD 12CA	22"	24 1/4"	17 1/8"	4"
5DDD 13DB	22"	25 5/8"	18 1/8"	4 3/8"
5DDD 15CA	26"	27 1/8"	18 1/2"	4 3/8"
5DDD 16DB	26"	29 3/4"	20 1/4"	4 3/4"
5DDD 18EB	30"	31 5/8"	21 3/8"	5 5/8"

5ACC..RD

Roof Mount Damper

Manufactured from 19-gauge galvanized steel fram 2" deep with 1" flange. For quiet operation aluminum blades have felted edges. Pre-punched conduit hole knock-out.



Specification Data

MODEL	FAN SIZE	RECOMMENDED ROOF OPENING	OUTSIDE FLANGE	WEIGHT, LBS	ITEM #
5ACC12RD	10"	12 1/2" x 12 1/2"	12" x 12"	3	47196
5ACC15RD	12", 13"	15 1/2" x 15 1/2"	15" x 15"	4	47203
5ACC19RD	15", 16"	19 1/2" x 19 1/2"	19" x 19"	5	47210
5ACC23RD	18", 20"	23 1/2" x 23 1/2"	23" x 23"	9	47215

